

SCENIUS UNICO

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.


Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.

Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

FULL POWER MODE (1400W)


Minimum Zoom (5.2°)

Total Output: 22930 lumens - 1400W POWER MODE

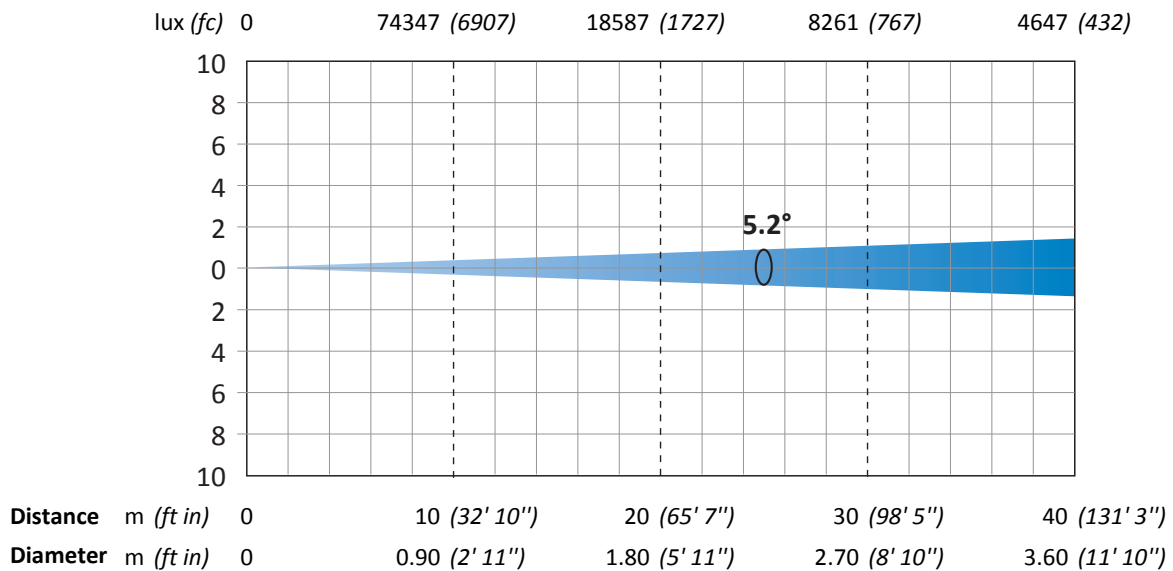

Minimum Zoom with Light Frost (5.4° 10% - 3.4° 50%)

Total Output: 21600 lumens - 1400W POWER MODE

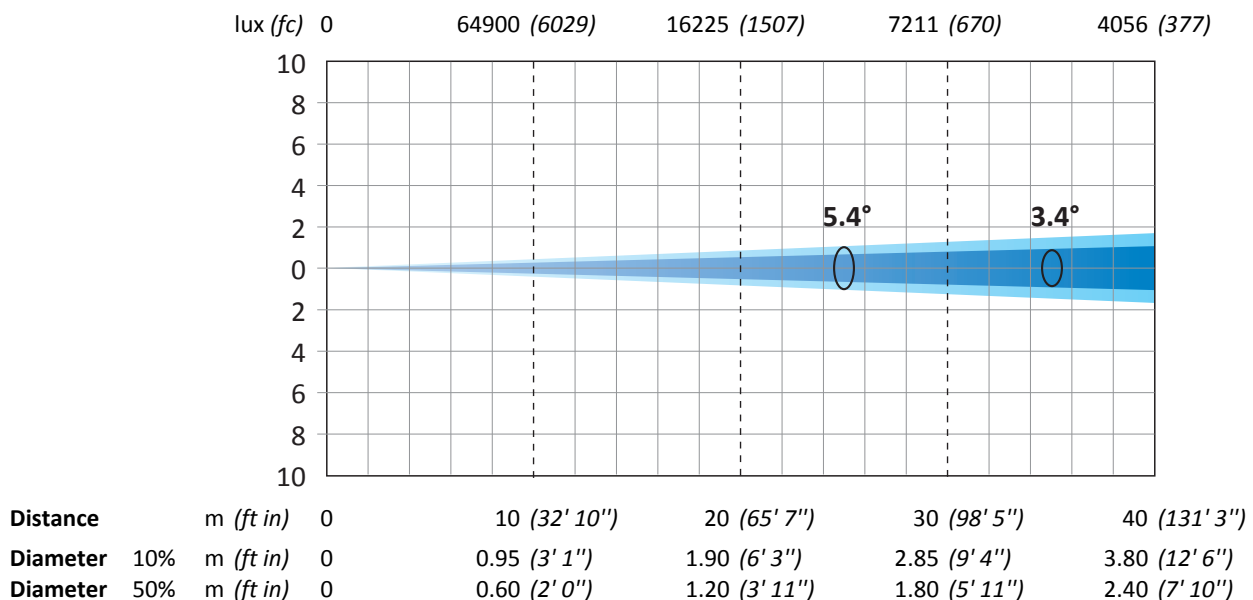


SCENIUS UNICO

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Minimum Zoom with Heavy Frost (6.6° 10% - 3.9° 50%)


Total Output: 21280 lumens - 1400W POWER MODE

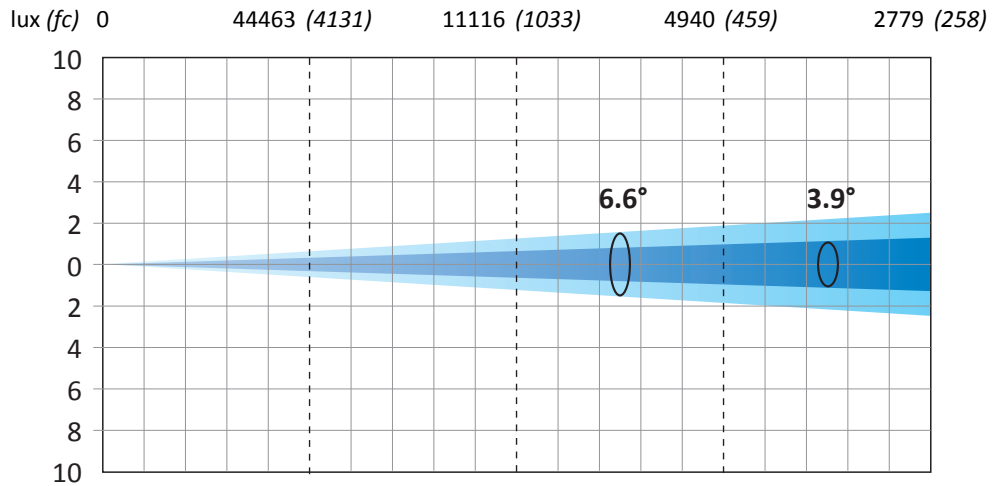

Distance	m (ft in)	0	10 (32' 10'')	20 (65' 7'')	30 (98' 5'')	40 (131' 3'')
Diameter 10%	m (ft in)	0	1.15 (3' 9'')	2.30 (7' 7'')	3.45 (11' 4'')	4.60 (15' 1'')
Diameter 50%	m (ft in)	0	0.68 (2' 3'')	1.36 (4' 6'')	2.04 (6' 8'')	2.72 (8' 11'')

Maximum Zoom (55.2°)

Total Output: 33130 lumens - 1400W POWER MODE

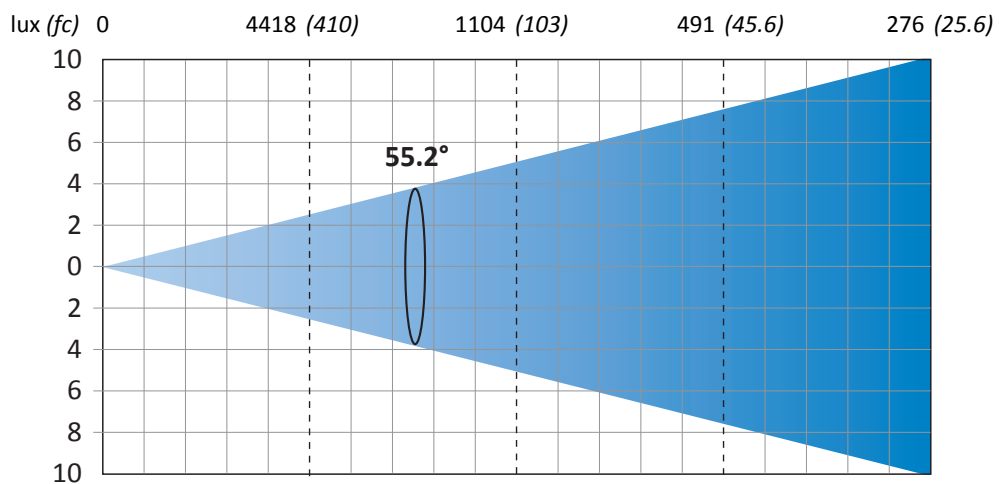


Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter	m (ft in)	0	5.23 (17' 2'')	10.47 (34' 4'')	15.70 (51' 6'')	20.93 (68' 8'')

SCENIUS UNICO

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Maximum Zoom with Light Frost (53.6° 10% - 28.1° 50%)


Total Output: 30970 lumens - 1400W POWER MODE

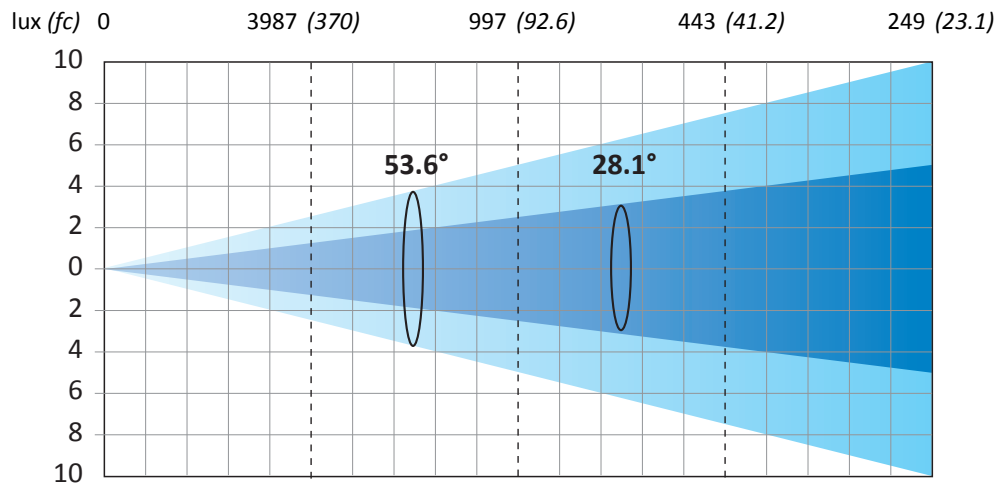

lux (fc)	0	3987 (370)	997 (92.6)	443 (41.2)	249 (23.1)	
Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter 10%	m (ft in)	0	5.05 (16' 7'')	10.10 (33' 2'')	15.15 (49' 8'')	20.20 (66' 3'')
Diameter 50%	m (ft in)	0	2.50 (8' 2'')	5.00 (16' 5'')	7.50 (24' 7'')	10.00 (32' 10'')

Maximum Zoom with Heavy Frost (53.9° 10% - 29.7° 50%)

Total Output: 29520 lumens - 1400W POWER MODE

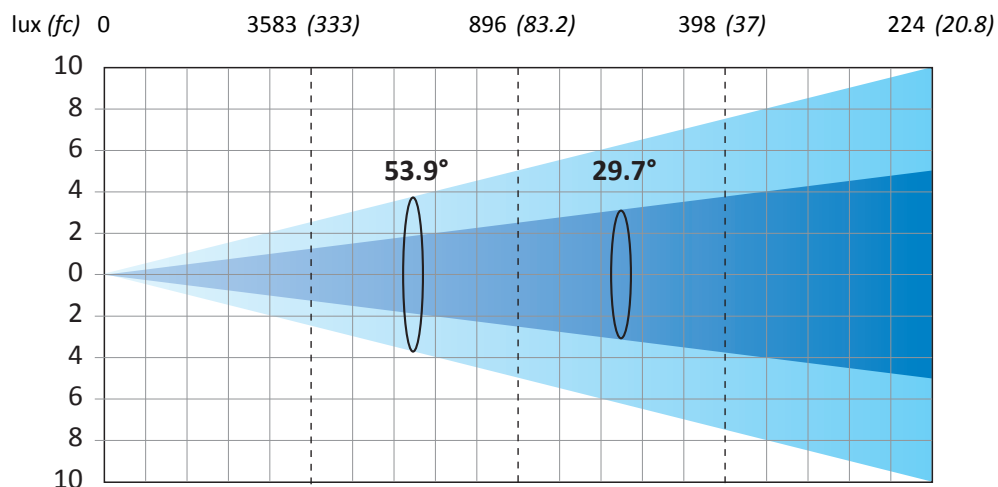

lux (fc)	0	3583 (333)	896 (83.2)	398 (37)	224 (20.8)	
Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter 10%	m (ft in)	0	5.08 (16' 8'')	10.17 (33' 4'')	15.25 (50' 0'')	20.33 (66' 9'')
Diameter 50%	m (ft in)	0	2.65 (8' 8'')	5.30 (17' 5'')	7.95 (26' 1'')	10.60 (34' 9'')

SCENIUS UNICO


- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

1200W POWER MODE


Minimum Zoom (5.2°)

Total Output: 20130 lumens - 1200W POWER MODE

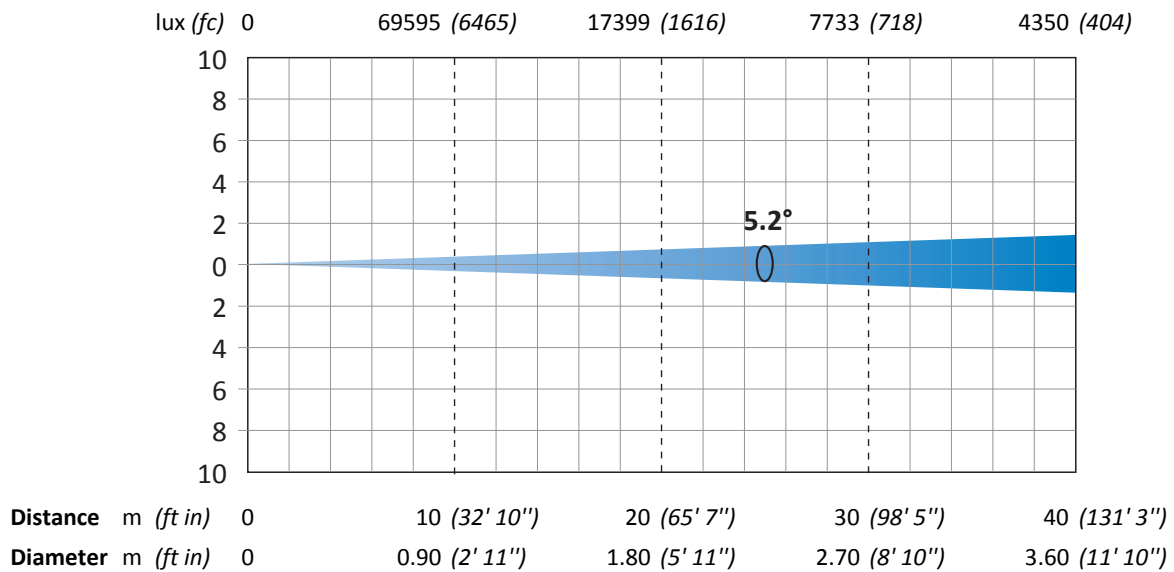

Minimum Zoom with Light Frost (5.4° 10% - 3.3° 50%)

Total Output: 19550 lumens - 1200W POWER MODE

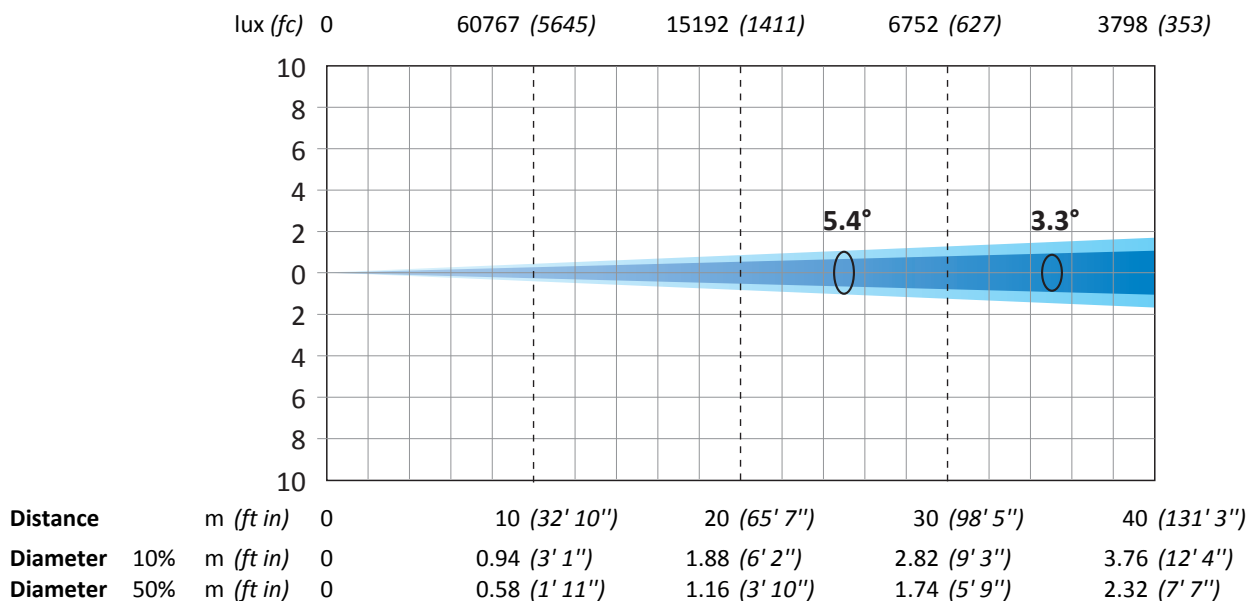


SCENIUS UNICO

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Minimum Zoom with Heavy Frost (6.6° 10% - 3.8° 50%)


Total Output: 19170 lumens - 1200W POWER MODE

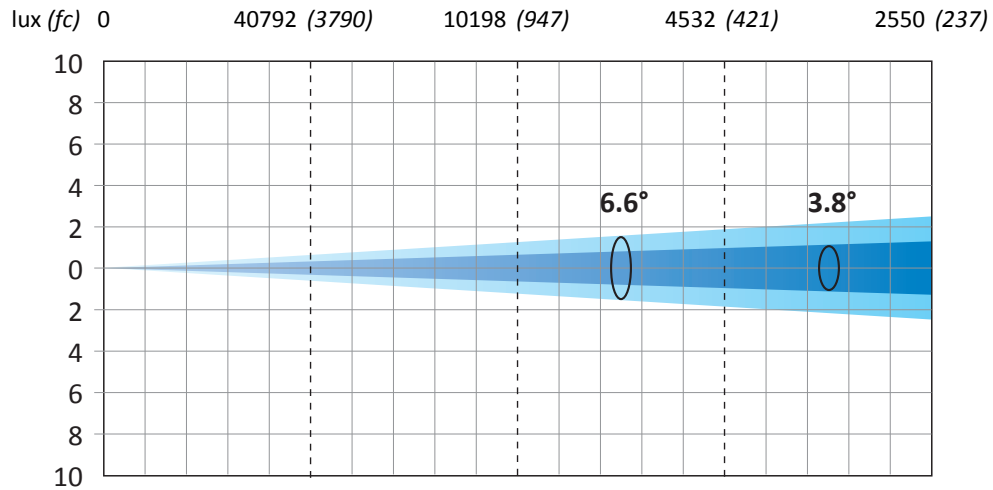

Distance	m (ft in)	0	10 (32' 10")	20 (65' 7")	30 (98' 5")	40 (131' 3")
Diameter 10%	m (ft in)	0	1.15 (3' 9")	2.30 (7' 7")	3.45 (11' 4")	4.60 (15' 1")
Diameter 50%	m (ft in)	0	0.67 (2' 2")	1.34 (4' 5")	2.01 (6' 7")	2.68 (8' 10")

Maximum Zoom (55.2°)

Total Output: 30000 lumens - 1200W POWER MODE

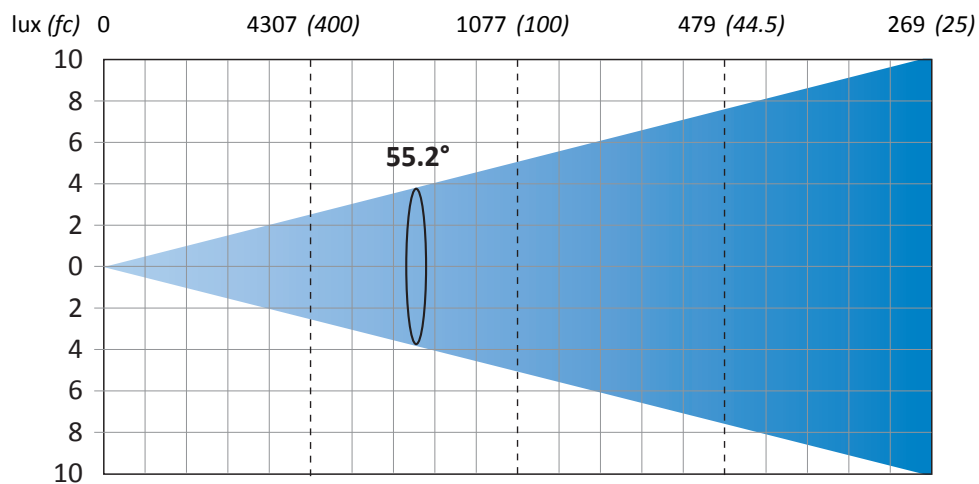


Distance	m (ft in)	0	5 (16' 5")	10 (32' 10")	15 (49' 3")	20 (65' 7")
Diameter	m (ft in)	0	5.23 (17' 2")	10.47 (34' 4")	15.70 (51' 6")	20.93 (68' 8")

SCENIUS UNICO

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Maximum Zoom with Light Frost (52.8° 10% - 26.1° 50%)


Total Output: 27980 lumens - 1200W POWER MODE

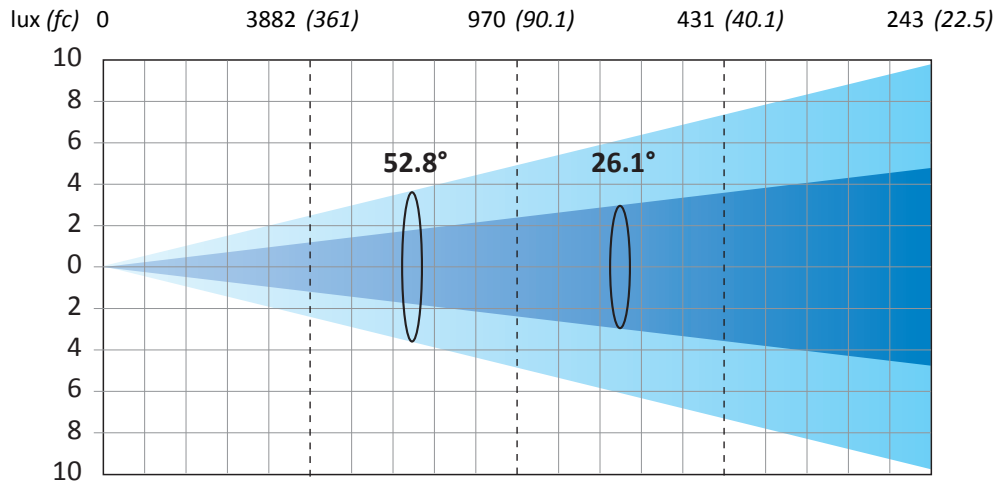

Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter 10%	m (ft in)	0	4.97 (16' 4'')	9.93 (32' 7'')	14.90 (48' 11'')	19.87 (65' 2'')
Diameter 50%	m (ft in)	0	2.32 (7' 7'')	4.63 (15' 2'')	6.95 (22' 10'')	9.27 (30' 5'')

Maximum Zoom with Heavy Frost (53.1° 10% - 27.9° 50%)

Total Output: 26920 lumens - 1200W POWER MODE

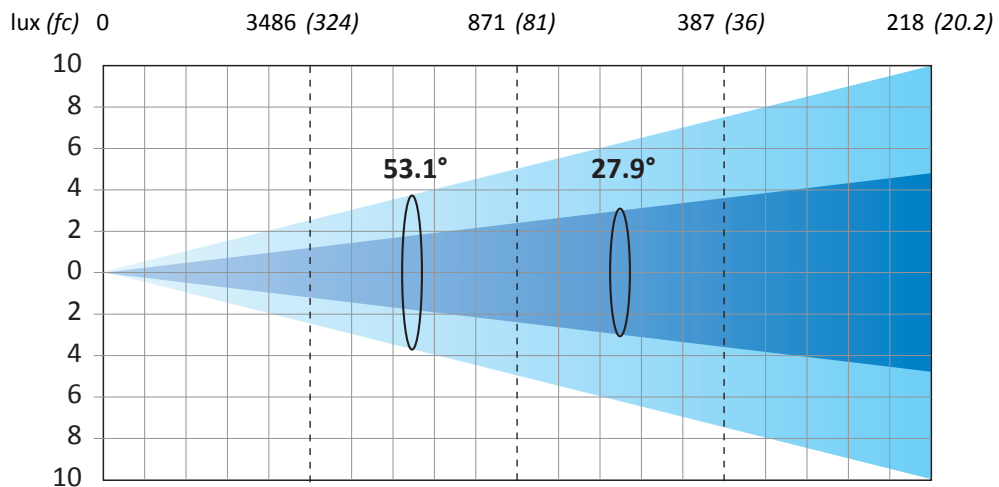

Distance	m (ft in)	0	5 (16' 5'')	10 (32' 10'')	15 (49' 3'')	20 (65' 7'')
Diameter 10%	m (ft in)	0	5.00 (16' 5'')	10.00 (32' 10'')	15.00 (49' 3'')	20.00 (65' 7'')
Diameter 50%	m (ft in)	0	2.48 (8' 2'')	4.97 (16' 4'')	7.45 (24' 5'')	9.93 (32' 7'')

SCENIUS UNICO

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

